


SAGOLA

an Elcometer company



Professional Bodyshop Painting Equipment

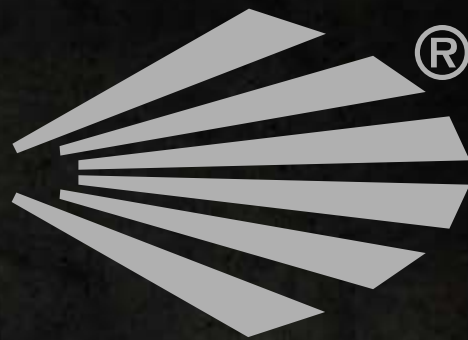

www.sagola.com

MADE IN
SPAIN

High engineering to minimize the number of parts that make up the gun, to eliminate every non-metallic part from the product area. To make it **STRONGER**.

Sagola DVR suction technology to make it the **FASTEST** spray gun on the market.

The highest gloss in HS clearcoats.

Standard
version

Digital
version



4600 Xtreme

Faster, stronger and more efficient

No other spray gun on the market is able to spray as much paint per minute.

The combination of **fluid nozzles** and **DVR aircaps** is the result of years of experience and technological development. Application speed and covering power never seen before in the Refinish industry.

Standard Code	Digital Code	Version	Application
10142214	10142233	1.20 XL [DVR TITANIA PRO]	Low viscosity Clearcoats. Express drying
10142202	10142222	1.30 [DVR TITANIA PRO]	HS & UHS Clearcoats
10142207	10142227	1.30 XL [DVR TITANIA PRO]	Single stage paints
10142216	10142235	1.20 XL [DVR CLEAR]	Low viscosity Clearcoats. Express drying
10142204	10142224	1.30 [DVR CLEAR]	HS & UHS Clearcoats
10142206	10142226	1.30 XL [DVR CLEAR]	Single Stage Paints
10142201	10142221	1.20 [DVR AQUA]	Waterborne basecoats
10142215	10142234	1.20 XL [DVR AQUA]	Waterborne basecoats
10142203	10142223	1.30 [DVR AQUA]	Solvent based basecoats
10142220	10142269	1.20 XL [DVR HVLP]	Water based basecoats
10142205	10142225	1.30 [DVR HVLP]	Water and solvent based basecoats
10142209	10142238	1.30 XL [DVR HVLP]	Water and solvent based basecoats, clearcoats and single stage



Approved for use by leading paint brands. Visit www.sagola.com to download our guides

Request information of the limited edition versions



RC1 AIR FLOW REGULATOR WITH GAUGE

The RC1 pressure regulator is the perfect ally for the Non-digital version. Hand tighten, no wrench needed. Perfect closing. No Teflon need in gun's air inlet.

Code

56418020



Finishes and Primers

Unreachable technologies for many...,
incorporated in our mid-range of sprayguns.

From a basecoat, to a filler or gun putty.

Wide variety of aircaps and fluid nozzles from 1.2 mm.
up to 2.8 mm.

Finishes: 1.3 - 1.4 mm.

Primers: 1.6 - 1.8 mm.

Gun putties: 2.0 - 2.8 mm.

3300 GTO

Versatility

HVLP and EPA high transfer Aircaps made of duralumin.
Forged aluminum body with 'soft touch' satin finish.
No joints or plastic gaskets in the product area. One-piece
self-adjusting packing gland. Ergonomic trigger made of stainless steel.

3300 GTO CAR version

Sagola EPA and HVLP high transfer system. High atomization level.
Versatility brought to the maximum expression. Suitable for both colour
and clearcoat and single stage products.

Code	Version	Application
10141551	1.30 [GTO TECH]	Low viscosity Clearcoats. Quick drying. Waterborne basecoat
10141552	1.40 [GTO TECH]	UHS Clearcoats, Single stage and Solvent Basecoats
10141554	1.30 [GTO HVLP]	Waterborne Basecoats
10141555	1.40 [GTO HVLP]	Solvent Basecoats

3300 GTO version

Wide variety of high transfer air caps. The perfect tool for your primer
jobs.

Code	Version	Application
10141563	1.60 [GTO EPA]	Smooth and uniform finish. Sanding Primers. Saving times and consumables in the sanding process
10141564	1.80 [GTO EPA]	Smooth and uniform finish. Sanding Primers. Saving times and consumables in the sanding process
10141556	1.60 [GTO HVLP]	Large fan size. Sanding Primers. Low air cap pressure to paint closer to the part and increase the transfer rate
10141557	1.80 [GTO HVLP]	Large fan size. Sanding Primers. Low air cap pressure to paint closer to the part and increase the transfer rate
10141559	1.30 [GTO EVO]	Large fan size. Primers Wet on Wet. Maximum atomization quality to achieve a flat finish.
10141560	1.40 [GTO EVO]	Large fan size. Primers Wet on Wet. Maximum atomization quality to achieve a flat finish.
10141572	2.20 [GTO 64S]	Maximum product output flow and atomization power for the application of putties on large surfaces. Smooth and uniform finish. Saving time and consumables in the sanding process
10141574	2.80 [GTO 62S]	Maximum product output flow and atomization power for the application of putties on large surfaces. Smooth and uniform finish. Saving time and consumables in the sanding process



3300 GTO CAR
version



3300 GTO
version

ONLY
GTO CAR versions
are included

RC2 AIR FLOW REGULATOR WITH GAUGE

It maintains the working pressure according to the parameters of Emissions regulations. (Green scale).
Accurate pressure at the gun inlet.
High quality pressure gauge.



Code
40000335

Spot Repair

All of our Xtreme identity in 365 grams:
metal-to-metal technology, aircaps made
of duralumin, forged and anodized body...

Ideal for parts painting

Mini Xtreme

The little beast

The best tool for quick everyday repairs. Adjusted fan size to save product on painting small parts. Air consumption of 190 L/min. Suitable to work with 2 HP compressors.

Code	Version	Application
10111801	0.80 [MINI AQUA]	Smart repair. Solvent and waterborne basecoat
10111802	1.00 [MINI AQUA]	Smart repair. Solvent and waterborne basecoat
10111803	1.20 [MINI AQUA]	Smart repair. Solvent and waterborne basecoat. UV Primer
10111809	1.00 [MINI HVL P]	Smart repair. Primers
10111810	1.20 [MINI HVL P]	Spot repair. Primers
10111804	1.30 [MINI HVL P]	Smart repair. Primers (500 ml. capacity gravity cup)
10111808	1.20 [MINI EPA]	Spot repair. Solvent and waterborne basecoats (500 ml.)



Accessories for sprayguns

LUBRICANT GREASE

Natural grease, specially made for spray guns and painting equipments moving parts lubrication. High consistency, even under extreme temperatures. Long lasting, it doesn't lose properties over the time.



Code
56418589

475 XTech

The importance of small details


The Sagola 475 XTech, designed for precision solutions in the small details and retouching of bodyshop parts.

Code	Version	Application
20140801	0.50 [05]	Retouches and feathering
20140802	0.80 [05]	Retouches and feathering
20140803	1.00 [10]	Clearcoats. Metallics
20140804	0.50 [R5]	Tiny feathering. High definition



CLEANING KIT

Complete cleaning set, including one brush for outside cleaning, and rods of different sizes for all the inner paths of the spray gun. Supplied in a practical show case.

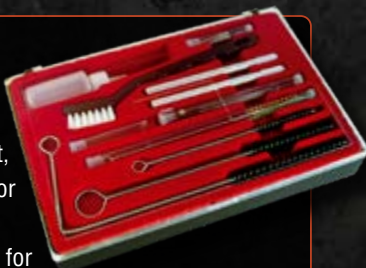

Code
4000086



Primers and Fillers

Classic Pro XD

**High transfer
in fillers and primers**

The Sagola Classic Pro XD Primer Gun incorporates EPA and HVLP high transfer aircaps. "Metal to metal" technology. No joints or plastic gaskets in the product area. Nozzle and needle made of stainless steel. Matt chrome-plated injected aluminum body. Maximum ergonomics and comfort.



Code	Version	Application
10141620	1.40 [21 EPA]	Finishes
10141623	1.60 [21 EPA]	Sanding fillers
10141625	1.80 [21 EPA]	Sanding fillers
10141621	1.40 [HVLP]	Finishes
10141624	1.60 [HVLP]	Sanding fillers
10141626	1.80 [HVLP]	Sanding fillers
10141627	2.00 [25]	HS primers. High thickness
10141629	2.50 [36]	Primers. High viscosity
10141630	2.80 [28]	Spray gun fillers

Classic Lux

**Toughness and
versatility**

Conventional painting system. Variety of applications. Nozzles and needles in stainless steel. Matt chrome injected aluminum body. Maximum ergonomics and comfort



Code	Version	Application
20141406	1.40 [40]	Finishes
20141401	1.60 [40]	Primers and Fillers
20141402	1.80 [40]	Primers and Fillers
20141404	2.00 [41]	Fillers. High thickness
20141403	2.50 [42]	Putties

Junior G

Economic, ergonomic

Spraygun with a robust body. Lightweight and ergonomic exclusive design by Sagola. Spraygun suitable for working with 1.5 HP power compressors. Very low air consumption. Incorporates air, product and fan flow regulators. 600 ml. cup capacity. Quick connector included.



Code	Version	Application
20141904	1.40	Finishes
20141903	1.60	Finishes and Primers
20141902	1.80	Fillers and Primers
20141905	1.80 BLISTER	Fillers and Primers



474

**Mini
spray gun**

Small-sized gravity spraygun special for retouches. Economic spraygun. Ideal for painting small areas and marking parts. Incorporates air, product and fan flow regulators. 120 ml. gravity cup capacity.



Code	Version	Application
10151701	0.80	Fine feathering
10151702	1.00	Small areas and parts marking

5300X

Maximum filtration level

Three filtered stages. Sinterised bronze 8 microns pre filtration is incorporated, followed by a 0.01 micron Coalescent filter and final filtration by a wide surface active charcoal filter.

This model eliminates, in addition to water and impurities, organic fumes and foul air.

Code
10730305



5200X

Two stages of filtering

Incorporates an 8 micron sinterised bronze filter followed by a final 0.01 micron coalescent filter. Automatic drain system and assisted regulator wheel. It carries out double filtration with optimum flow and pressure regulation, retention of water and impurities achieving an air purity of 99%.

Code
10730304



5100X

Automatic drain

Air purifying filter with pressure regulator and pressure gauge. Its case is tougher and more protective. 5100X filter comes with a new draining system which reduces maintenance costs due to its greater durability. The filtering system retains water and impurities. Incorporates 8 micron sinterised filter.

Code
10730202



5050X

Ideal for pre-filtering

Purifier Filter with automatic drain system. Ideal for pre-filtering in industrial air lines. Incorporates 8 micron sinterised bronze filter.

Line pre-filter for: medium compressor output (1/2" air inlet), mains level changes, booth input,...

Code
10730301



5000X

Perfect price/quality ratio

Ideal for solvent basecoat paint booths and preparation areas. The 5000X model features a semi-automatic drain system and dual air outlets.

Filtering system that retains water, oil and other impurities. Incorporates a 20 micron filter.

Code
10730204



Replacement filter kit

Includes timer.



Sintered bronze filter

Replace filter every 6 months

Code

56418719



Coalescent filter

Replace filter every 6 months

Code

56418071



Active charcoal filter

Replace filter every 3 months

Code

56418070

Air filtering systems

4220 PLUS

Maximum air quality

Two stage air filter. Maximum filtering level. Recommended for last generation finishes. Waterborne paints, HS clearcoats and enamels, high gloss lacquers.

1st Stage. Filtration of water, oil and particles + 2nd Stage Submicron Filtering. 0.01 Microns.

Code
10750402



4120 PLUS

High filtering power

Effective solution for compressed air filtration in professional paint booths for: car refinish, wood, machinery, plastics and industry in general.

Water, oil and particulate removal by 20 micron sintered bronze filter. Friction and centrifugation filtering.

Code
10730502



Replacement filter kit

4220 & 4120 Plus filter



Coalescent filter

Code
56418722



Sintered bronze filter 20 µ

Code
56418721

970 PLUS

Maximum precision

The virtues of the regulator-filter 479+ is now linked to a lubricating element, setting itself apart as specific workshop equipment. It supplies clean, lubricated air to all your your pneumatic tools.

Accurate control of the oil content by means of a "drop-by-drop" hand regulator, zero pressure loss thanks to the in-line design, maximum reliability and productivity in the most compact package.

Ensures the supply of clean air and properly lubricated to tools and pneumatic engines.

Code
10750301
10750302
10750303



479 PLUS

Great filtrating capacity

The most compact solution for the small workshops, industry or priming and preparation areas.

Large air flow, maximum reliability regulating system, high quality pressure gauge, the best materials. Don't underestimate your small painting works or reduce the life of your pneumatic tools by using poor quality regulators and no filtration capacity.

Great filtration capacity. Semi-automatic drain system, it has everything in a minimum space.

Code
10730401
10730402
10730403



430 PLUS

Mini air regulator

Small, robust, reliable and long lasting. Mechanized from a solid aluminium block.

Quality pressure gauge up to 10 bar. Double scale bar/psi. Quick release and short shift wheel.

Code
10740501
10740502
10740503



439 PLUS

High flow filter

Suitable for all type of installations, accessories included. Made of aluminium. High-durability. Check window for liquid waste. Semi-automatic drain system. Minimum pressure loss.

Code
10720401
10720402
10720403



437 PLUS

Lubricator

Ideal for the proper lubrication of pneumatic tools. Oil level check window.

Code
10710301
10710302
10710303





Anti-static Air hose

Anti-static air hose. ideal for painting in the booth. Light, flexible and manageable. Twist free. Ø 8 x 15 mm.



Code	Code	Code	Length
56414024	-	-	6 m.
56414025	56414047	56414049	11 m.
56414027	56414048	56414050	16 m.
56414026	-	-	26 m.

Drying guns for waterborne products

Code
10340401

Super Flow

Includes venturi regulator to adapt drying technique to the coated surface, retouched area or entire part. Larger volume of air outlet for a quicker water evaporation. Can be fully dismantled to facilitate cleaning and proper maintenance (avoiding pollution).



Code
40000297

Classic venturi

Very light drying gun that facilitates work in the workshop.

Thanks to the Venturi system, reduces drying time.



Sealer gun

3900 PLUS

Compact, efficient and light. Trigger with discharge valve, which guarantees a great precision and control.

Code
10330201



Underbody protection

Antigravel gun

Code
10330301

518 PRO

Total regulation on product flow and quality of atomization and spray size. Air inflow regulator.



Code
20330401

416

Gun for the application of standardized acoustic insulation 1 L. cartridges. To be screwed directly to the cartridge.



Spraygun Washer

Compact washing machine of small size, ideal for workshops with little room. 100% Stainless Steel. Solvent washer.

S 25

Code
40000521



Airbrushing

XTech range

XTech 200

Dual action professional airbrush and gravity feed paint system. 1.5 c.c. deposit.

Code	Version
17410601	0.2
17410602	0.3



Airbrushes for automotive, fine arts, bodypaint, tanning, illustration, make-up, model making, confectionery, temporary tattoo - tattoo, textiles, nail decoration...



Code	Version
17410901	0.3
17410902	0.5

Dual action professional airbrush and suction feed paint system. 22 c.c. deposit.